

SIGNATURE SERIES SOTTILE 18" DEPTH WINE RESERVE

HH24WS-3 INDOOR MODEL

HH24WO-3 OUTDOOR MODEL



Glass Door Model



Solid Door Model

GENERAL SIGNATURE SERIES SOTTILE FEATURES



- 32" height including leveling legs
- **Industry Exclusive** 18" depth for design flexibility
- Plug recessed for true 18" depth
- **Industry Exclusive** front-vented RAPIDcool forced-air refrigeration system provides best-in-class cooling performance
- Commercial-grade stainless steel interior and exterior
- All models available with stainless steel or panel ready door. Panel ready doors come ready to accept customer-supplied overlay and handle
- Full extension refrigerator and wine shelves provide easy access for stocking and retrieving product. Shelves glide smoothly in and out of cabinet on stainless steel ball bearing glides
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- Adjustable Crisp White and Cool Blue LED lighting
- Low E, double pane UV-resistant glass provides exceptional insulation and protection from light
- State-of-the-art digital control module
- Comprehensive Full Three Year Warranty plus additional three years on sealed system

HH24WS/WO FEATURES

- Available with stainless steel solid door, panel ready solid door, stainless steel glass door or panel ready glass door
- Includes four (4) full-extension wine shelves
- Wine shelves feature stainless steel fronts
- Shelves are soft-coat vinyl dipped to gently cradle bottles and protect them from vibration transfer
- Product capacity is 20 wine bottles (750 ml.)
- Wine Reserve temperature 45°- 65°F

ACCESSORIES

(L)	Factory Installed Lock
67992-L/R	Stacking Kit for HH24 models
67115-24	Wood Faces for Wine Shelves (7/pk)
67360	6" Toe Kick and Riser

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com/residential

PRODUCT SPECIFICATIONS

Product Width	23-7/8" (606 mm.)
Product Height	32" (813 mm.)
Product Depth	18" (457 mm.)
Opening Width	24" (610 mm.)
Opening Height	32-1/4" (819 mm.)
Opening Depth	18" (457 mm.)
Refrigerated Volume	3.1 cu. ft.
Door Swing Clearance	25" (635 mm.) minimum
Electrical	115V, 60Hz., 1 Phase, 2.3 amps
Compressor	525 BTU, standard
Plumbing	None Required
Annual Energy Usage	N/A
Shipping Weight	185 lbs (83.91 kg.)

INDOOR MODELS


HH24WS-3-1L*	Stainless steel solid door, hinge left
HH24WS-3-2L*†	Panel ready solid door, hinge left
HH24WS-3-3L*	Stainless steel glass door, hinge left
HH24WS-3-4L*†	Panel ready glass door, hinge left

OUTDOOR MODELS

HH24WO-3-1L*	Stainless steel solid door, hinge left
HH24WO-3-2L*†	Panel ready solid door, hinge left
HH24WO-3-3L*	Stainless steel glass door, hinge left
HH24WO-3-4L*†	Panel ready glass door, hinge left

* Also available hinge right (R)

† This unit comes ready to accept customer-provided overlay panel and handle

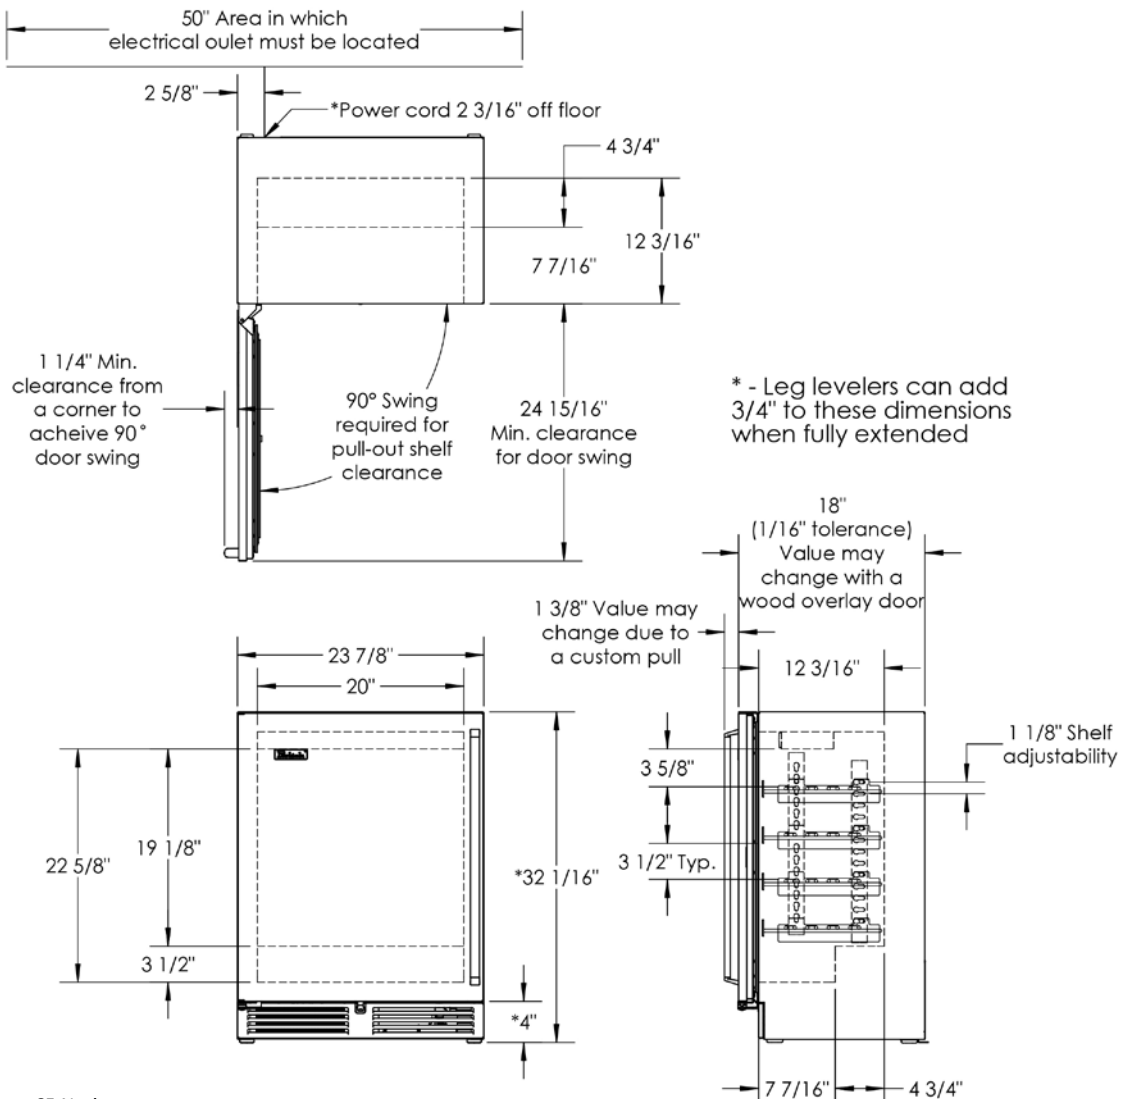

California Prop 65 Notice:

WARNING: The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

FORM NO. Z2520
REV. A-09/07/2018