

48" SIGNATURE SERIES WINE RESERVE (TWO TEMPERATURE)

HP48WW-3 48" INDOOR MODEL



Glass Door Model



Solid Door Model

GENERAL SIGNATURE SERIES FEATURES



- **Industry Exclusive** front-vented RAPIDcool forced-air refrigeration system provides best-in-class cooling performance
- Powerful yet efficient 995 BTU variable-speed compressor ramps up to quickly bring down temperature of room temperature product
- Features two separate temperature zones
- Commercial-grade stainless steel interior and exterior
- All models available with stainless steel or panel ready door. Panel ready doors come ready to accept customer-supplied overlay and handle
- Full extension wine shelves provide easy access for stocking and retrieving product. Shelves glide smoothly in and out of cabinet on stainless steel ball bearing glides
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- Adjustable Crisp White and Cool Blue LED lighting
- Low E, double pane UV-resistant glass provides exceptional insulation and protection from light
- State-of-the-art digital control module
- Comprehensive Full Three Year Warranty plus additional three years on sealed system

HP48WW FEATURES

- Available with stainless steel solid door, panel ready solid door, stainless steel glass door or panel ready glass door
- Left compartment (zone 1) includes four (4) full-extension wine shelves for storage of 32 bottles (with room below for additional bottles with accessory wine rack)
- Right compartment (zone 2) includes six (6) full-extension wine shelves for storage of 48 wine bottles
- Wine shelves are removable and adjustable to accommodate oversized (magnum) bottles
- Wine Reserve temperature 45° - 65°F

ACCESSORIES

(L)	Factory Installed Lock
67993-LR	Stacking Kit for HP48 models
65629	Bottle Presentation Rack
67115-24	Wood Faces for Wine Shelves (7/pkg)

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com/residential

FORM NO. Z2544
REV. A-09/07/2018

PRODUCT SPECIFICATIONS


Product Width	47-7/8" (1216 mm.)
Product Height	34-1/4" (870 mm.)
Product Depth	24" (610 mm.)
Opening Width	48" (1219 mm.)
Opening Height	34-1/2" (876 mm.)
Opening Depth**	24-7/8" (632 mm.)
Refrigerated Volume	11.1 cu. ft total
Door Swing Clearance	25" (635 mm.)
Electrical	115V, 60Hz., 1 Phase, 2.3 amps
Compressor	995 BTU, variable-speed
Plumbing	None Required
Annual Energy Usage	N/A
Shipping Weight	332 lbs (150.60 kg.)

** Includes 7/8" plug clearance. To achieve 24" depth, you must recess the plug into the wall directly behind the unit.

INDOOR MODELS

HP48WW-S-3-1L-1R*	Stainless Steel Solid Door, Hinged Left, and Stainless Steel Solid Door, Hinged Right
HP48WW-S-3-1L-3R*	Stainless Steel Solid Door, Hinged Left, and Stainless Steel Glass Door, Hinged Right
HP48WW-S-3-3L-1R*	Stainless Steel Glass Door, Hinged Left, and Stainless Steel Solid Door, Hinged Right
HP48WW-S-3-3L-3R*	Stainless Steel Glass Door, Hinged Left, and Stainless Steel Glass Door, Hinged Right

*Model numbers listed above include stainless steel doors. Units can also be ordered ready to accept customer-supplied panel and handles (panel ready solid door - 2, panel ready glass door - 4)

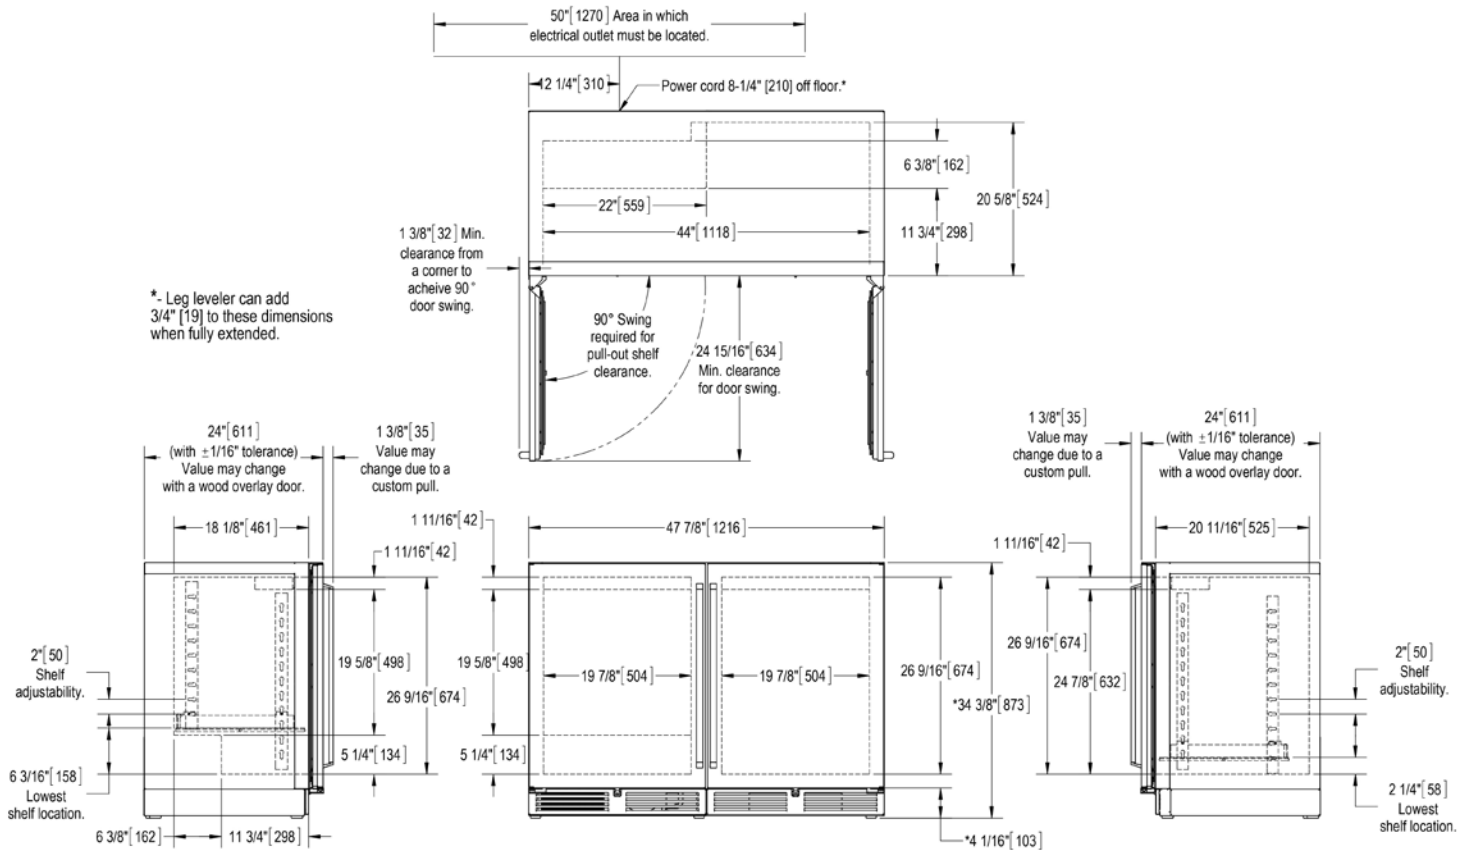

California Prop 65 Notice:

WARNING: The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

FORM NO. Z2544
REV. A-09/07/2018