

**Perlick** WALL MOUNT ELECTRONIC SENSOR FAUCET



|           |  |
|-----------|--|
| JOB       |  |
| AREA      |  |
| ITEM NO.  |  |
| MODEL NO. |  |

|              |
|--------------|
| <b>MODEL</b> |
| 944GN        |



Electronic touch-free faucet allows for increased sanitation in a busy work environment. Fits Perlick TS Series sinks in ModBar applications.

**Product Features:**


- **ONLY** wall-mount 4" center gooseneck touchless faucet on market that fits under a standard height bar top\*
- Solid cast brass body with polished chrome plated finish
- Infrared motion sensor turns on/off faucet with the swipe of your hands
- Water resistant control module box with Internal flow control setting switches
- Plug in AC transformer or (4) AA batteries with low battery LED indicator light
- Temperature control mixing valve with integral check valves
- Operates at 20 - 125 psi [1.38 - 8.62 bar]

*\*in most typical bar applications*

| PART NO.                  | 944GN                                                                                                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>APPLICATION</b>        | "Touch-Free" faucet for increased sanitation.                                                                               |
| <b>FLOW RATE</b>          | 2.20 GPM [8.3 L/min] @ 60 psi [4.14 bar]                                                                                    |
| <b>WATER TEMP.</b>        | 40 F - 140 F [4.44 C - 60 C] Mechanical temperature mixing valve with integral check valves                                 |
| <b>POWER SUPPLY</b>       | 100-240 VAC Adapter with 71" [1800mm] Long Power Cable or (4) AA batteries with low battery indicator                       |
| <b>SENSOR RANGE</b>       | 2"- 10" (5- 25cm) based on sink type and illumination.                                                                      |
| <b>WORKING PRESSURE</b>   | 20 - 125 psi [1.38 - 8.62 bar]                                                                                              |
| <b>RUNNING TIME RANGE</b> | 15 seconds - 20 minutes (6 presets selectable)                                                                              |
| <b>PRODUCT COMPLIANCE</b> | NSF/ANSI 61 - Section 9; ASME A112.18.1 / CSA B125.1; UL 1951; ANSI A117.1 (ADA); NSF/ANSI 372 (Low Lead Content 0.25% Max) |



**PERLICK TOUCH-FREE FAUCET ADAPTER**

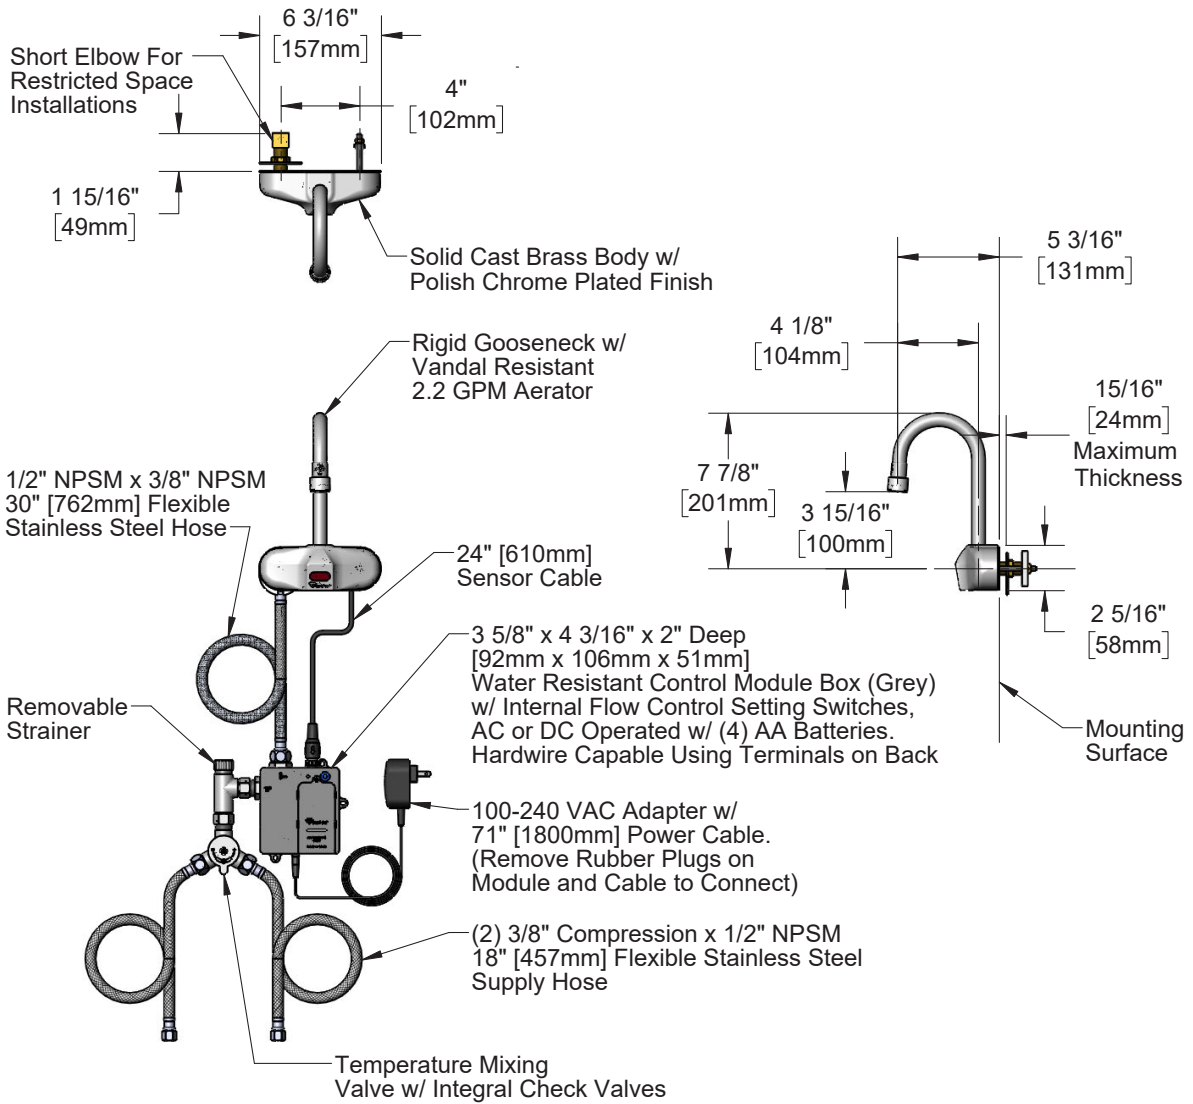

Rough-In Requirement:  
 (2) 1" [25mm] Mounting Holes on 4" [102mm] Centers

**California Prop 65 Notice:**

**!** **WARNING:** The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm, For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**WARNING:** This product can expose you to chemicals including Lead, Chromium (hexavalent compounds) and Phthalates (DEHP) which are known to the State of California to cause cancer and birth defects or other reproductive harm.

Form No. Z2658  
 Rev 08.26.20