## PASS THRU STATION ICE CHEST 38" Depth With and Without Cold Plate





JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS							
Cold Plate	Non-Cold Plate						
SS24IC10	SS24IC						
SS30IC10	SS30IC						
SS36IC10	SS36IC						
SS24IC20*							
SS30IC20*							
SS36IC20*							

<sup>\*</sup>With Dual 10-Circuit Cold Plates

## **KEY PRODUCT FEATURES AND BENEFITS**

- All stainless for durable easy to clean surfaces
- Fully insulated to reduce ice melt in warm climates
- Highly efficient cold plates instantly chill your soft drinks to the correct temperature
- Eco-friendly foam insulation is efficient and has zero impact on global warming or ozone depletion
- · Available with or without a cold plate to suit your bartender's needs

## **Quick Features:**


- · Pass-thru design allowing both the bartender and cocktail server access
- · All stainless construction for durability
- Available with 10 or 20 circuit cold plate to service both sides of the bin




## PASS THRU STATION ICE CHEST 38" Depth With and Without Cold Plate

MODEL NOS.	SS24IC	SS30IC	SS36IC	SS24IC10	SS30IC10	SS36IC10	SS24IC20	SS30IC20	SS36IC20			
	W	Without Cold Plate			With 10-Circuit Cold Plate			With Dual 10-Circuit Cold Plates				
LENGTH, INCHES (mm)	24(610)	30 (762)	36 (914)	24 (610)	30 (762)	36 (914)	24 (610)	30 (762)	36 (914)			
ICE CAPACITY, LBS. (kg)	185 (83.9)	235 (106.6)	290 (131.5)	185 (83.9)	235 (106.6)	290 (131.5)	185 (83.9)	235 (106.6)	290 (131.5)			
# OF COLD PLATE CIRCUITS	0	0	0	1	1	1	2	2	2			
FRONT & SIDES	Stainless steel, top rim ABS											
воттом	Galvanized ste	Galvanized steel										
COVERS	Stainless steel,	Stainless steel, three-piece, removable										
INTERIOR	Stainless steel ice dividers	Stainless steel with 1/4" radius corners, welded and sealer with non-exposed cold plate. Interiors can be divided with accessory freestanding ice dividers										
INSULATION	Eco-friendly fo	Eco-friendly foamed-in-place polyurethane										
LEGS	1-5/8" tubular,	1-5/8" tubular, stainless steel with 1" adjustable thermoplastic foot										
PLUMBING	Drain connection – 1/2" NPS male											
COLD PLATE		Cast aluminum plate concealed under ice chest liner. Cold plate has 2 full-length circuits and 8 half-length circuits.  Connections – 5/16" O.D. stainless steel tubing with swagged end to accept standard 1/4" I.D. beverage tubing										
OPERATING SPECIFICATIONS		Each full circuit will deliver four 6 oz. drinks per minute at 40° continuously, or 40 oz. every three minutes in a single draw (flow rate 2 oz./sec, 75° ambient, 75° product)										
OPTIONAL ACCESSORIES	Front and Back	Front and Back Covers, 3 Plastic Wells, 4 Piece Cover Set, 3 Plastic Bottle Wells, S.S. Bottle Holder, 4 Piece Cover Set, S.S. Bottle Holder										

**Note:** Covers not included. Soda Chase not applicable; soda lines must be routed behind adjacent equipment (IC10 and IC models only).



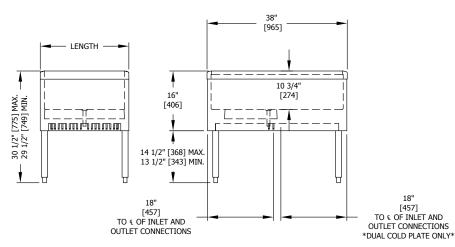

Form No. IC03 Rev. 03.25.22