

### SIGNATURE SERIES SHALLOW DEPTH 18" Depth Wine Reserve







**Solid Door Model** 







JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	DESCRIPTION			
HH24WS-4-1R/L Indoor Shallow Depth Wine Reserve Solid Stainless Steel [				
HH24WS-4-2R/L	Indoor Shallow Depth Wine Reserve Solid Panel Ready Door			
HH24WS-4-3R/L	Indoor Shallow Depth Wine Reserve Stainless Steel Glass Door			
HH24WS-4-4R/L	Indoor Shallow Depth Wine Reserve Panel Ready Glass Door			
HH24WO-4-1R/L	Outdoor Shallow Depth Wine Reserve Solid Stainless Steel Door			
HH24WO-4-2R/L	Outdoor Shallow Depth Wine Reserve Solid Panel Ready Door			
HH24WO-4-3R/L	Outdoor Shallow Depth Wine Reserve Stainless Steel Glass Door			
HH24WO-4-4R/L	Outdoor Shallow Depth Wine Reserve Panel Ready Glass Door			
HH24WM-4-1R/L	Marine Shallow Depth Wine Reserve Solid Stainless Steel Door			
HH24WM-4-2R/L	Marine Shallow Depth Wine Reserve Solid Panel Ready Door			
HH24WM-4-3R/L	Marine Shallow Depth Wine Reserve Stainless Steel Glass Door			
HH24WM-4-4R/L	Marine Shallow Depth Wine Reserve Panel Ready Glass Door			

#### **KEY PRODUCT FEATURES AND BENEFITS**

- Industry's first 18" shallow depth for ultimate design flexibility in tight spaces
- Industry's largest selection of ADA-height compliant models for accessible and aging in place designs
- Superior construction provides ideal combination of energy efficient operation & powerful refrigeration performance ideal for food and beverages
- 1000 BTU/hr capacity delivers industry's most energy efficient cool down; indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- All stainless steel interior and exterior provide superior durability and easy cleaning
- Wine shelves fully extend on vibration dampened, stainless steel ball-bearing glides; stainless steel wine shelves will not absorb odors over time
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (Outdoor and Marine models only)
- Marine & Coastal Grade with Perlick Armor™ upgrades stainless steel, fasteners, and refrigeration system to the highest blend of corrosion resistance and food safety

#### **Quick Features:**

- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready door to match your design style
- Audible door alarm warns user if door is held open
- Selectable blue or white LED lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential
- Storage for up to 68 cans



### **SIGNATURE SERIES SHALLOW DEPTH** 18" Depth Wine Reserve

MODEL NUMBERS		HH24WS	HH24WO	HH24WM
MODEL DESCRIPTION		18" Indoor Wine Reserve	18" Outdoor Wine Reserve	18" Marine/Coastal Wine Reserve
ATTRIBUTES				
Perlick Anti-Condensation System		NO	YES	YES
Perlick Armor™		NO	NO	YES
OVERALL DIMENSIONS	Width - in. (mm)	23-7/8" (606 mm)	23-7/8" (606 mm)	23-7/8" (606 mm)
	Depth - in. (mm)	18" (457 mm)	18" (457 mm)	18" (457 mm)
	Height - in. (mm)	32" (813 mm)	32" (813 mm)	32" (813 mm)
STANDARD OPENING DIMENSIONS	Width - in. (mm)	24" (610 mm)	24" (610 mm)	24" (610 mm)
	Depth - in. (mm)	18" (457 mm)	18" (457 mm)	18" (457 mm)
	Height - in. (mm)	32-1/4" (819 mm)	32-1/4" (819 mm)	32-1/4" (819 mm)
INTERNAL VOLUME Net. Cu. Ft.		3.1 cu. ft.	3.1 cu. ft.	3.1 cu. ft.
SHIPPING WEIGHT Lbs. (kg.)		185 lbs (83.91 kg)	185 lbs (83.91 kg)	185 lbs (83.91 kg)
ELECTRICAL SPECIFICATIONS	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	Running Load Amps	1,9 amps	1,9 amps	1,9 amps
	Electrical Connection	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord Length	6′	6′	6′
	Defrost Initiation	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle
	Thermostat	Digital	Digital	Digital
	Lighting Type	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Refrigerant	R600a (62g)	R600a (62g)	R600a (62g)
	Expansion Device	Capillary Tube	Capillary Tube	Capillary Tube
	Temperature Settings F°(C°)	45° (7.2°) - 65° (18.3°) <b>Factory Set Point</b> 55° (12.7°)	45° (7.2°) - 65° (18.3°) <b>Factory Set Point</b> 55° (12.7°)	45° (7.2°) - 65° (18.3°) <b>Factory Set Point</b> 55° (12.7°)
	Heat Rejection (at 75°F)	350 BTU/hr	350 BTU/hr	350 BTU/hr
	Pull Down Capacity	1000 BTU/hr	1000 BTU/hr	1000 BTU/hr
	Front Vented	Yes	Yes	Yes
PLUMBING		None Required	None Required	None Required

Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.

#### **ACCESSORIES**

MODEL NOS.	DESCRIPTION			
(L)	Factory Installed Lock			
67992-L/R	Stacking Kit for HH24 models			
67115-24	Wood Faces for Wine Shelves (7/pk)			
67360	6"Toe Kick and Riser			

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com.



#### WARNING: California Prop 65 Notice

These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at perlick.com. Or to find out more about Prop 65, go to **P65Warnings.ca.gov**.

> Form No.Z2673 Rev 11.02.22




# SIGNATURE SERIES SHALLOW DEPTH 18" Depth Wine Reserve

	CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
	HH24WS-4-1L	HH24WS4F-00-SLF0W	Left	No
	HH24WS-4-1R	HH24WS4F-00-SRF0W	Right	No
	HH24WS-4-2L	HH24WS4F-00-PL00W	Left	No
	HH24WS-4-2R	HH24WS4F-00-PR00W	Right	No
ľ	HH24WS-4-3L	HH24WS4F-00-TLF0W	Left	No
	HH24WS-4-3R	HH24WS4F-00-TRF0W	Right	No
NO.	HH24WS-4-4L	HH24WS4F-00-RL00W	Left	No
	HH24WS-4-4R	HH24WS4F-00-RR00W	Right	No
NDOOR	HH24WS-4-1LL	HH24WS4F-00-SLFLW	Left	Yes
_	HH24WS-4-1RL	HH24WS4F-00-SRFLW	Right	Yes
	HH24WS-4-2LL	HH24WS4F-00-PL0LW	Left	Yes
	HH24WS-4-2RL	HH24WS4F-00-PR0LW	Right	Yes
	HH24WS-4-3LL	HH24WS4F-00-TLFLW	Left	Yes
	HH24WS-4-3RL	HH24WS4F-00-TRFLW	Right	Yes
	HH24WS-4-4LL	HH24WS4F-00-RL0LW	Left	Yes
	HH24WS-4-4RL	HH24WS4F-00-RR0LW	Right	Yes
	HH24WO-4-1L	HH24WO4F-00-SLF0W	Left	No
	HH24WO-4-1R	HH24WO4F-00-SRF0W	Right	No
	HH24WO-4-2L	HH24WO4F-00-PL00W	Left	No
	HH24WO-4-2R	HH24WO4F-00-PR00W	Right	No
	HH24WO-4-3L	HH24WO4F-00-TLF0W	Left	No
	HH24WO-4-3R	HH24WO4F-00-TRF0W	Right	No
	HH24WO-4-4L	HH24WO4F-00-RL00W	Left	No
OUTDOOR	HH24WO-4-4R	HH24WO4F-00-RR00W	Right	No
Ē	HH24WO-4-1LL	HH24WO4F-00-SLFLW	Left	Yes
ō	HH24WO-4-1RL	HH24WO4F-00-SRFLW	Right	Yes
	HH24WO-4-2LL	HH24WO4F-00-PL0LW	Left	Yes
	HH24WO-4-2RL	HH24WO4F-00-PR0LW	Right	Yes
	HH24WO-4-3LL	HH24WO4F-00-TLFLW	Left	Yes
	HH24WO-4-3RL	HH24WO4F-00-TRFLW	Right	Yes
	HH24WO-4-4LL	HH24WO4F-00-RL0LW	Left	Yes
	HH24WO-4-4RL	HH24WO4F-00-RR0LW	Right	Yes
	HH24WM-4-1L	HH24WM4F-00-MLF0W	Left	No
	HH24WM-4-1R	HH24WM4F-00-MRF0W	Right	No
	HH24WM-4-2L	HH24WM4F-00-PL00W	Left	No
	HH24WM-4-2R	HH24WM4F-00-PR00W	Right	No
	HH24WM-4-3L	HH24WM4F-00-NLF0W	Left	No
	HH24WM-4-3R	HH24WM4F-00-NRF0W	Right	No
STA	HH24WM-4-4L	HH24WM4F-00-RL00W	Left	No
COA	HH24WM-4-4R	HH24WM4F-00-RR00W	Right	No
MARINE & COASTAL	HH24WM-4-1LL	HH24WM4F-00-MLFLW	Left	Yes
	HH24WM-4-1RL	HH24WM4F-00-MRFLW	Right	Yes
	HH24WM-4-2LL	HH24WM4F-00-PL0LW	Left	Yes
	HH24WM-4-2RL	HH24WM4F-00-PR0LW	Right	Yes
	HH24WM-4-3LL	HH24WM4F-00-NLFLW	Left	Yes
	HH24WM-4-3RL	HH24WM4F-00-NRFLW	Right	Yes
	HH24WM-4-4LL	HH24WM4F-00-RL0LW	Left	Yes
	HH24WM-4-4RL	HH24WM4F-00-RR0LW	Right	Yes
				. 25

Form No.Z2673 Rev 11.02.22



## SIGNATURE SERIES SHALLOW DEPTH 18" Depth Wine Reserve

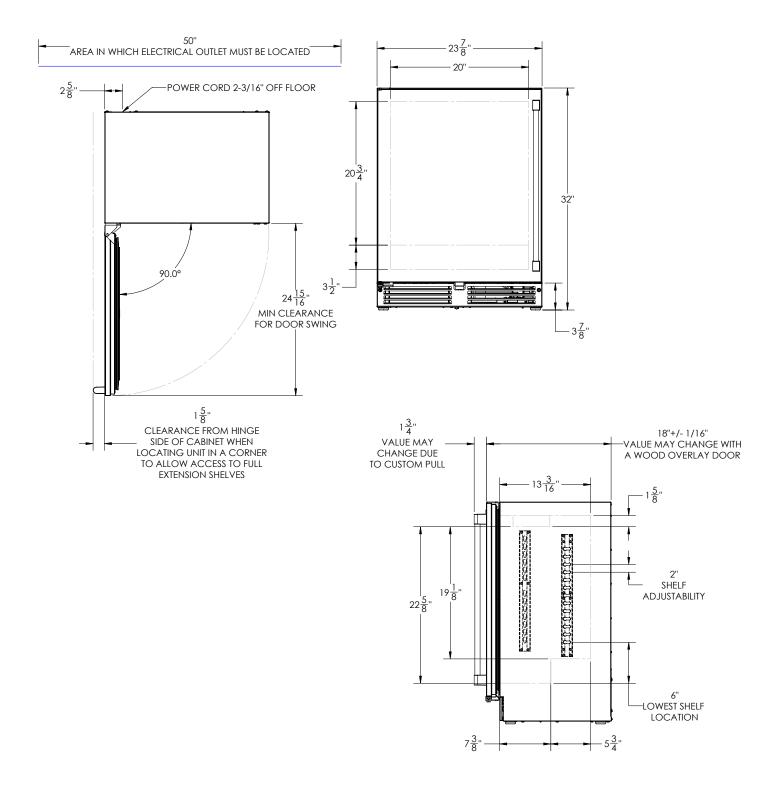

Form No.Z2673 Rev 11.02.22