



MODELS	DESCRIPTION		
HC24TB-4-1L/R-1	Indoor C-Series Beverage Dispenser Solid Stainless Steel Door 1 Faucet		
HC24TB-4-2L/R-1	Indoor C-Series Beverage Dispenser Solid Panel Ready Door 1 Faucet		
HC24TB-4-1L/R-2	C24TB-4-1L/R-2 Indoor C-Series Beverage Dispenser Solid Stainless Steel Door 2 Faucets		
HC24TB-4-2L/R-2	4-2L/R-2 Indoor C-Series Beverage Dispenser Solid Panel Ready Door 2 Faucets		
HC24TO-4-1L/R-1	Outdoor C-Series Beverage Dispenser Solid Stainless Steel Door 1 Faucet		
HC24TO-4-2L/R-1	Outdoor C-Series Beverage Dispenser Solid Panel Ready Door 1 Faucet		
HC24TO-4-1L/R-2	Outdoor C-Series Beverage Dispenser Solid Stainless Steel Door 2 Faucets		
HC24TO-4-2L/R-2	Outdoor C-Series Beverage Dispenser Solid Panel Ready Door 2 Faucets		

KEY PRODUCT FEATURES AND BENEFITS

- Superior construction provides ideal combination of energy efficient operation & powerful refrigeration performance ideal for kegged beverages
- 800 BTU/hr capacity delivers commercial grade cooling performance
- Forced air refrigeration technology ensures consistent temperature throughout entire keg maintaining flavor better than other brands
- Commercial-grade all stainless steel interior provides superior durability and easy cleaning

Quick Features:

Single Faucet Indoor

• Industry's best full 6 year warranty for owner ease of mind

Two Faucet Outdoor

- Available with stainless steel or panel ready door to match your design style
- Outdoor models include a full stainless steel exterior; indoor models feature a black vinyl exterior for built in applications
- Audible door alarm warns user if door is held open
- White LED task lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential
- Accommodates two (2) 1/6 barrels or one (1) 1/4 slim or standard barrel



One 1/4 barrel (standard or slim)



Two 1/6 barrel



MODEL NUMBERS		НС24ТВ	НС24ТО	
MODEL DESCRIPTION		24" Indoor Beverage Dispenser	24" Outdoor Beverage Dispenser	
ATTRIBUTES				
Perlick Anti-Condensation System		NO	NO	
Energy Star Certified		YES	YES	
OVERALL DIMENSIONS	Width - in. (mm)	23-7/8" (606 mm.)	23-7/8" (606 mm.)	
	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)	
	Height - in. (mm)	34-1/4" (870 mm.)	34-1/4" (870 mm.)	
	Width - in. (mm)	24" (610 mm.)	24" (610 mm.)	
STANDARD OPENING DIMENSIONS	Depth - in. (mm)	24-7/8" (632 mm.)	24-7/8" (632 mm.)	
	Height - in. (mm)	34-1/2" (876 mm.)	34-1/2" (876 mm.)	
INTERNAL VOLUME Net. Cu. Ft.		5.2 cu. ft.	5.2 cu. ft.	
SHIPPING WEIGHT Lbs. (kg.)		222 lbs (100.7 kg.)	222 lbs (100.7 kg.)	
	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph	
	Running Load Amps	1.9 amps	1.9 amps	
	Electrical Connection	Cord connected	Cord connected	
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P	
ELECTRICAL SPECIFICATIONS	Cord Length	6′	6′	
	Defrost Initiation	Automatic	Automatic	
	Defrost Type	Off cycle	Off cycle	
	Thermostat	Digital	Digital	
	Lighting Type	LED	LED	
	Refrigerant	R600a (62g)	R600a (62g)	
	Expansion Device	Capillary Tube	Capillary Tube	
REFRIGERATION SPECIFICATIONS	Temperature Settings F°(C°)	33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°)	33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°)	
	Heat Rejection (at 75°F)	450 BTU/hr	450 BTU/hr	
	Pull Down Capacity	800 BTU/hr	800 BTU/hr	
	Front Vented	Yes	Yes	
PLUMBING		None Required	None Required	

 $\textbf{Installation Notes:} \ To \ a chieve \ 24'' \ install \ depth, place \ electrical \ connection \ adjacent \ to \ the \ installation \ cavity.$

ACCESSORIES

MODEL NOS.	DESCRIPTION	
(L)	Factory Installed Lock	
66736	Caster Kit for HP24/HC24/HA24 models	
63797	Beer Dispenser Cleaning Kit	
40030S	Low Profile Keg Coupler	
308-40C	Faucet Lock for C-Series 630SS Beer Faucets	
BLC4/32	Beer Dispenser Sanitizer (4 oz. or 32 oz.)	

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com.




WARNING: California Prop 65 Notice


These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at perlick.com. Or to find out more about Prop 65, go to **P65Warnings.ca.gov**.



CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
HC24TB-4-1L-1	HC24TB4C-B0-SLS0T	Left	No
HC24TB-4-1R-1	HC24TB4C-B0-SRS0T	Right	No
HC24TB-4-2L-1	HC24TB4C-B0-PL00T	Left	No
HC24TB-4-2R-1	HC24TB4C-B0-PR00T	Right	No
HC24TB-4-1L-2	HC24TB4C-C0-SLS0T	Left	No
HC24TB-4-1R-2	HC24TB4C-C0-SRS0T	Right	No
HC24TB-4-2L-2	HC24TB4C-C0-PL00T	Left	No
HC24TB-4-2R-2	HC24TB4C-C0-PR00T	Right	No
HC24TB-4-1LL-1	HC24TB4C-B0-SLSLT	Left	Yes
HC24TB-4-1RL-1	HC24TB4C-B0-SRSLT	Right	Yes
HC24TB-4-2LL-1	HC24TB4C-B0-PL0LT	Left	Yes
HC24TB-4-2RL-1	HC24TB4C-B0-PR0LT	Right	Yes
HC24TB-4-1LL-2	HC24TB4C-C0-SLSLT	Left	Yes
HC24TB-4-1RL-2	HC24TB4C-C0-SRSLT	Right	Yes
HC24TB-4-2LL-2	HC24TB4C-C0-PL0LT	Left	Yes
HC24TB-4-2RL-2	HC24TB4C-C0-PR0LT	Right	Yes
HC24TO-4-1L-1	HC24TO4C-B0-SLS0T	Left	No
HC24TO-4-1R-1	HC24TO4C-B0-SRS0T	Right	No
HC24TO-4-2L-1	HC24TO4C-B0-PL00T	Left	No
HC24TO-4-2R-1	HC24TO4C-B0-PR00T	Right	No
HC24TO-4-1L-2	HC24TO4C-C0-SLS0T	Left	No
HC24TO-4-1R-2	HC24TO4C-C0-SRS0T	Right	No
HC24TO-4-2L-2	HC24TO4C-C0-PL00T	Left	No
HC24TO-4-2R-2	HC24TO4C-C0-PR00T	Right	No
HC24TO-4-1LL-1	HC24TO4C-B0-SLSLT	Left	Yes
HC24TO-4-1RL-1	HC24TO4C-B0-SRSLT	Right	Yes
HC24TO-4-2LL-1	HC24TO4C-B0-PL0LT	Left	Yes
HC24TO-4-2RL-1	HC24TO4C-B0-PR0LT	Right	Yes
HC24TO-4-1LL-2	HC24TO4C-C0-SLSLT	Left	Yes
HC24TO-4-1RL-2	HC24TO4C-C0-SRSLT	Right	Yes
HC24TO-4-2LL-2	HC24TO4C-C0-PL0LT	Left	Yes
HC24TO-4-2RL-2	HC24TO4C-C0-PR0LT	Right	Yes



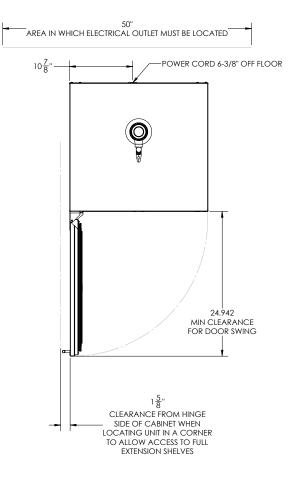

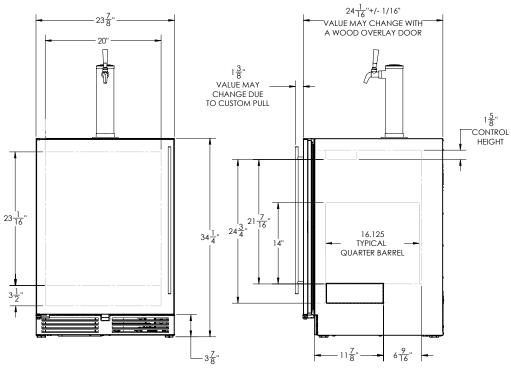

Form No.Z2681 Rev 11.07.22