







JOB	
AREA	
ITEM NO.	
MODEL NO.	



Solid Door Model

MODELS	DESCRIPTION		
HP24FS-4-1L/R	Indoor Signature Series Freezer Solid Stainless Steel Door		
HP24FS-4-2L/R	Indoor Signature Series Freezer Solid Panel Ready Door		
HP24FO-4-1L/R	Outdoor Signature Series Freezer Solid Stainless Steel Door		
HP24FO-4-2L/R	Outdoor Signature Series Freezer Solid Panel Ready Door		
HP24FM-4-1L/R	Marine Signature Series Freezer Solid Stainless Steel Door		
HP24FM-4-2L/R	Marine Signature Series Freezer Solid Panel Ready Door		

KEY PRODUCT FEATURES AND BENEFITS

- Superior construction provides ideal combination of energy efficient operation & powerful refrigeration performance ideal for food and beverages
- 1000 BTU/hr capacity delivers industry's most energy efficient cool down; indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- All stainless steel interior and exterior provides superior durability and easy cleaning
- Full extension shelving provides faster and safer product access with no reaching in the back of the cabinet; shelves fully extend on vibration dampened stainless steel ball bearing glides
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (Outdoor and Marine models only)
- Marine & Coastal Grade with Perlick Armor™ upgrades stainless steel, fasteners, and refrigeration system to the highest blend of corrosion resistance and food safety

Quick Features:

- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready doors to match your design style
- Audible door alarm warns user if door is held open
- White LED task lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential
- Available storage racks for martini glasses and beer mugs allow you to store glasses with an assortment of liquors just like your favorite cocktail bar!



MODEL NUMBERS		HP24FS	HP24FO	HP24FM
MODEL DESCRIPTION		24″ Indoor Freezer	24" Outdoor Freezer	24" Marine/Coastal Freezer
ATTRIBUTES				
Perlick Anti-Condensation System		NO	YES	YES
Perlick Armor™		NO	NO	YES
	Width - in. (mm)	23-7/8" (606 mm.)	23-7/8" (606 mm.)	23-7/8" (606 mm.)
OVERALL DIMENSIONS	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
	Height - in. (mm)	34-1/4" (870 mm.)	34-1/4" (870 mm.)	34-1/4" (870 mm.)
	Width - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
OPENING DIMENSIONS	Depth - in. (mm)	24-7/8" (632 mm.)	24-7/8" (632 mm.)	24-7/8" (632 mm.)
	Height - in. (mm)	34-1/2" (876 mm.)	34-1/2" (876 mm.)	34-1/2" (876 mm.)
INTERNAL VOLUME Net. Cu. Ft.		5.2 cu. ft.	5.2 cu. ft.	5.2 cu. ft.
SHIPPING WEIGHT Lbs. (kg.)		144 lbs (100.7 kg.)	144 lbs (100.7 kg.)	144 lbs (100.7 kg.)
	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	Running Load Amps	2.2 amps	2.2 amps	2.2 amps
ELECTRICAL SPECIFICATIONS	Electrical Connection	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord Length	6'	6′	6′
	Defrost Initiation	Hot Gas	Hot Gas	Hot Gas
	Defrost Type	Off cycle	Off cycle	Off cycle
	Thermostat	Digital	Digital	Digital
	Lighting Type	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Refrigerant	R600a (57g)	R600a (57g)	R600a (57g)
	Expansion Device	Capillary Tube	Capillary Tube	Capillary Tube
	Temperature Settings F°(C°)	-10° (-23.3°) - 10° (-12.2°) Factory Set Point 0° (-17.8°)	-10° (-23.3°) - 10° (-12.2°) Factory Set Point 0° (-17.8°)	-10° (-23.3°) - 10° (-12.2°) Factory Set Point 0° (-17.8°)
	Heat Rejection (at 75°F)	700 BTU/hr	700 BTU/hr	700 BTU/hr
	Pull Down Capacity	1000 BTU/hr	1000 BTU/hr	1000 BTU/hr
	Front Vented	Yes	Yes	Yes
PLUMBING		None Required	None Required	None Required

Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.

ACCESSORIES

MODEL NOS.	DESCRIPTION			
(L)	Factory Installed Lock			
67991-L/R	Stacking Kit for HP24/HC24/HA24 models			
66736	Caster Kit for HP24/HC24/HA24 models			
RS-24-24M	Martini Rack			

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit **perlick.com.**



WARNING: California Prop 65 Notice

These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at perlick.com. Or to find out more about **Prop 65**, go to **P65Warnings.ca.gov**.


Form No. Z2691 Rev 11.07.22




24" SIGNATURE SERIES Freezer

	CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
	HP24FS-4-1L	HP24FS4A-00-SLF0R	Left	No
	HP24FS-4-1R	HP24FS4A-00-SRF0R	Right	No
	HP24FS-4-2L	HP24FS4A-00-PL00R	Left	No
INDOOR	HP24FS-4-2R	HP24FS4A-00-PR00R	Right	No
<u>N</u>	HP24FS-4-1LL	HP24FS4A-00-SLFLR	Left	Yes
	HP24FS-4-1RL	HP24FS4A-00-SRFLR	Right	Yes
	HP24FS-4-2LL	HP24FS4A-00-PL0LR	Left	Yes
	HP24FS-4-2RL	HP24FS4A-00-PR0LR	Right	Yes
	HP24FO-4-1L	HP24FO4A-00-SLF0R	Left	No
	HP24FO-4-1R	HP24FO4A-00-SRF0R	Right	No
œ	HP24FO-4-2L	HP24FO4A-00-PL00R	Left	No
OUTDOOR	HP24FO-4-2R	HP24FO4A-00-PR00R	Right	No
150 150	HP24FO-4-1LL	HP24FO4A-00-SLFLR	Left	Yes
	HP24FO-4-1RL	HP24FO4A-00-SRFLR	Right	Yes
	HP24FO-4-2LL	HP24FO4A-00-PL0LR	Left	Yes
	HP24FO-4-2RL	HP24FO4A-00-PR0LR	Right	Yes
	HP24FM-4-1L	HP24FM4A-00-MLF0R	Left	No
ب	HP24FM-4-1R	HP24FM4A-00-MRF0R	Right	No
COASTAL	HP24FM-4-2L	HP24FM4A-00-PL00R	Left	No
	HP24FM-4-2R	HP24FM4A-00-PR00R	Right	No
MARINE &	HP24FM-4-1LL	HP24FM4A-00-MLFLR	Left	Yes
	HP24FM-4-1RL	HP24FM4A-00-MRFLR	Right	Yes
2	HP24FM-4-2LL	HP24FM4A-00-PL0LR	Left	Yes
	HP24FM-4-2RL	HP24FM4A-00-PR0LR	Right	Yes



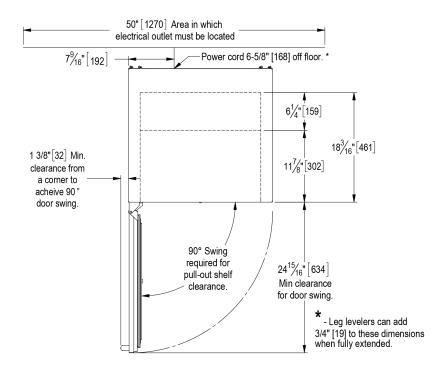

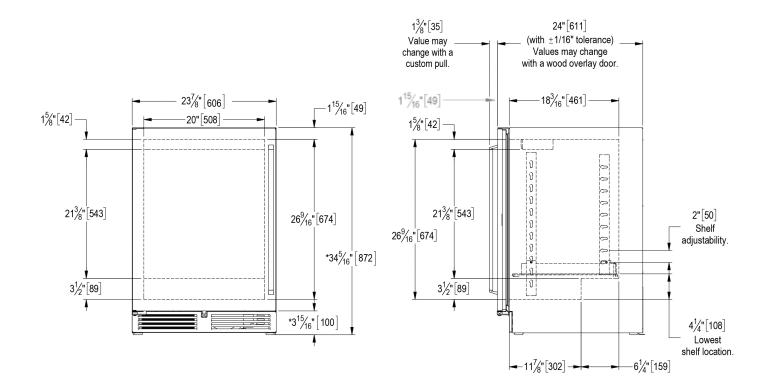

Form No. Z2691 Rev 11.07.22