



AVENUE H-PIPE TOWERS
Quick Chill



4072-8QC-PO-SS

JOB
AREA
ITEM NO.
MODEL NO.

Models
4072-6QC-PO-SS
4072-8QC-PO-SS
4072-10QC-PO-SS
4072-12QC-PO-SS
4072-14QC-PO-SS
4072-16QC-PO-SS

The modern, clean design of **Avenue Tower** makes it a great fit for any bar. Engineered for durability, the stainless-steel design will last for years. Perlick's superior heat exchanger and insulation guarantee a perfect pour.

KEY PRODUCT FEATURES AND BENEFITS

- The simple, clean lines of the **Avenue Tower** offer a design that easily adapts to any space
- Pure copper coolant lines and cold block maintain chilled beverage temperature, minimizing foam and lost profits
- Insulated dispensing head and shank bushings minimize sweating to keep your bar clean, cool more efficiently for energy reduction, and reduce warm spots in the tower to give you the perfect pour
- Tight seams and hidden fasteners offer a seamless and sophisticated design and make the tower easier to clean
- 304 Stainless steel shanks ensure purity of flavor from keg to tap

Quick Features:

- Avenue H-Pipe is available in even number faucet configurations between 6 and 16
- Additional faucet configurations available with the T-Pipe, making the Avenue family compatible with a wide range of bar layouts
- Mounting hardware is concealed below the bar top, creating a more sanitary dispensing solution
- NSF listed

ACCESSORIES

MODEL NOS.	DESCRIPTION
630SS	Stainless steel forward sealing faucet
650SS	Stainless steel forward sealing faucet w/ flow control
680SS	Stainless steel faucet with push-back creamer
690SS	Stainless steel flow control faucet with push-back creamer
63927	Stout and ale faucet - stainless steel body and spout
308-40C	Beer faucet lock for 630 Series faucets
67141	Perlick pub handle - 7-1/2" wooden handle


* Faucets sold separately



AVENUE H-PIPE TOWERS
Quick Chill

MODEL NUMBERS		4072-6QC-PO-SS	4072-8QC-PO-SS	4072-10QC-PO-SS	4072-12QC-PO-SS	4072-14QC-PO-SS	4072-16QC-PO-SS
NUMBER OF FAUCETS		6	8	10	12	14	16
"A" DIMENSION LENGTH (MM)		26-7/8" (632)	30-7/8" (784)	36-7/8" (937)	42-7/8" (1089)	48-7/8" (1241)	54-5/8" (1394)
"B" DIMENSION, FAUCET CENTERS (MM)		3" (76)	3" (76)	3" (76)	3" (76)	3" (76)	3" (76)
SHIPPING WEIGHT, LBS. (KG)		28 (12)	30 (13)	32 (14)	35 (15)	37 (16)	37 (16)
OPTIONAL DRIP PAN	TOP MOUNT - 5000 SERIES	5025	5028	5030	5030	5034	5036
	TOP MOUNT - C18000 SERIES	C18645A	C18650A	C18655	C18658	C18660	C18663
	RECESSED	C32357	58979	58979	58979	69324	69327

Perlick reserves the right to change specifications without notice.

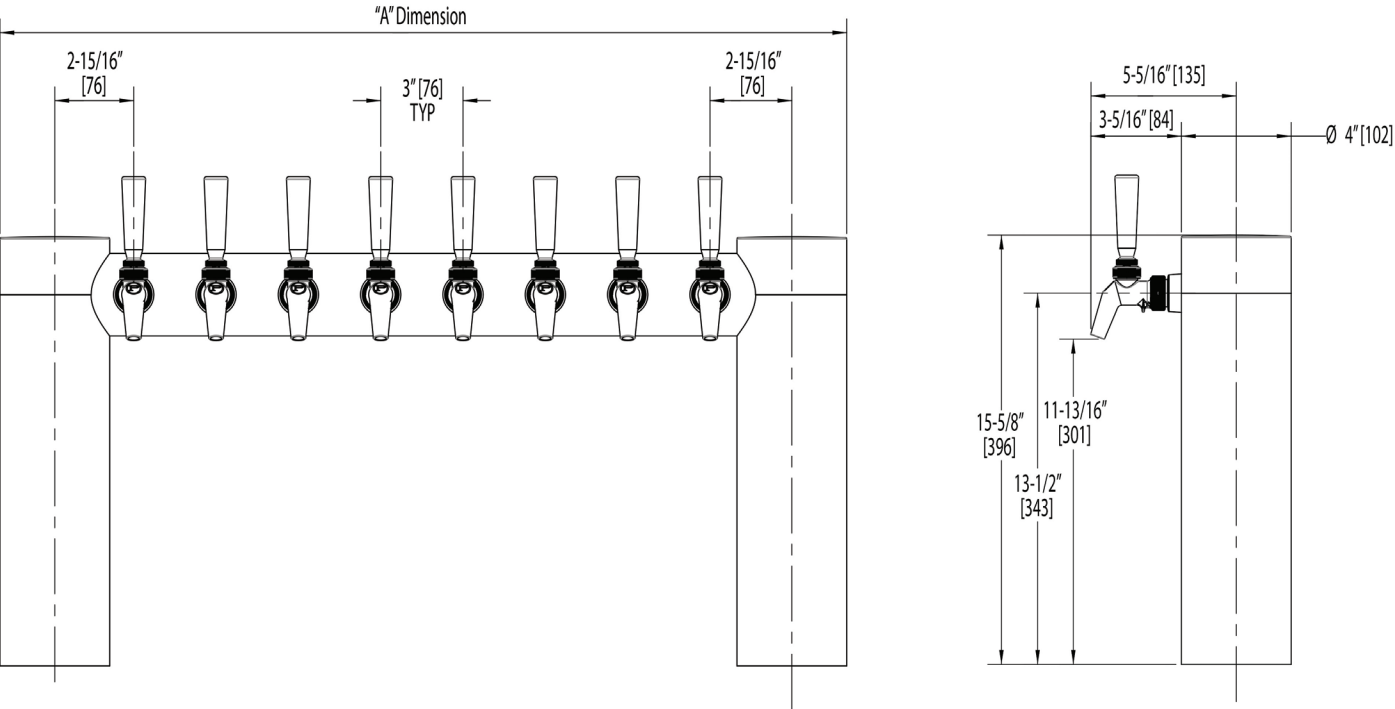

4072-8QC-PO-SS

MODEL NUMBERS - 4072-6QC-PO-SS, 4072-8QC-PO-SS, 4072-10QC-PO-SS, 4072-12QC-PO-SS, 4072-14QC-PO-SS, 4072-16QC-PO-SS