PRODUCT SPECIFICATION SHEETS Quick Chill Dispensing Towers - Glycol-cooled Avenue T-Pipe Towers

AVENUE T-PIPE TOWERS erlick Quick Chill

COMPONENT



```
JOB
AREA
ITEM NO.
MODEL NO.
```

Models					
4073-4QC-PO-SS					
4073-6QC-PO-SS					
4073-8QC-PO-SS					
4073-10QC-PO-SS					
4073-12QC-PO-SS					

The modern, clean design of Avenue Tower makes it a great fit for any bar. Engineered for durability, the stainless-steel design will last for years. Perlick's superior heat exchanger and insulation guarantee a perfect pour.

KEY PRODUCT FEATURES AND BENEFITS

- The simple, clean lines of the **Avenue Tower** offer a design that easily adapts to any space
- Pure copper coolant lines and cold block maintain chilled beverage temperature, minimizing foam and lost profits
- Insulated dispensing head and shank bushings minimize sweating to keep your bar clean, cool more efficiently for energy reduction, and reduce warm spots in the tower to give you the perfect pour
- Tight seams and hidden fasteners offer a seamless and sophisticated design and make the tower easier to clean ٠
- 304 Stainless steel shanks ensure purity of flavor from keg to tap

Quick Features:

- Avenue T-Pipe is available in even number faucet configurations between 4 and 12
- Additional faucet configurations available with the H-Pipe, making the Avenue family compatible with a wide range of bar layouts
- Mounting hardware is concealed below the bar top, creating a more sanitary dispensing solution
- NSF listed

ACCESSORIES

MODEL NOS.	DESCRIPTION				
630SS	Stainless steel forward sealing faucet				
650SS	Stainless steel forward sealing faucet w/ flow control				
680SS	Stainless steel faucet with push-back creamer				
690SS	Stainless steel flow control faucet with push-back creamer				
63927	Stout and ale faucet - stainless steel body and spout				
308-40C	Beer faucet lock for 630 Series faucets				
67141	Perlick pub handle - 7-1/2" wooden handle				


* Faucets sold separately

Form No. Z2715 Rev. 02.28.23 Perlick[®]

AVENUE T-PIPE TOWERS

MODEL NUMBERS		4073-4QC-PO-SS	4073-6QC-PO-SS	4073-8QC-PO-SS	4073-10QC-PO-SS	4073-12QC-PO-SS
NUMBER OF FAUCETS		4	6	8	10	12
"A" DIMENSION LENGTH (MM)		16" (406)	22" (559)	28" (711)	34" (864)	40″ (1016)
"B" DIMENSION, FAUCET CENTERS (MM)		3″ (76)	3″ (76)	3″ (76)	3″ (76)	3″ (76)
SHIPPING WEIGHT, LBS. (KG)		30 (13)	32 (14)	35 (15)	37 (16)	39" (991)
	TOP MOUNT - 5020 SERIES	5025	5028	5030	5030	5034
OPTIONAL DRIP PAN	TOP MOUNT - C18000 SERIES	C18645A	C18650A	C18655	C18655	C18660
	RECESSED	C32357	58979	58979	58979	69324

Perlick reserves the right to change specifications without notice.

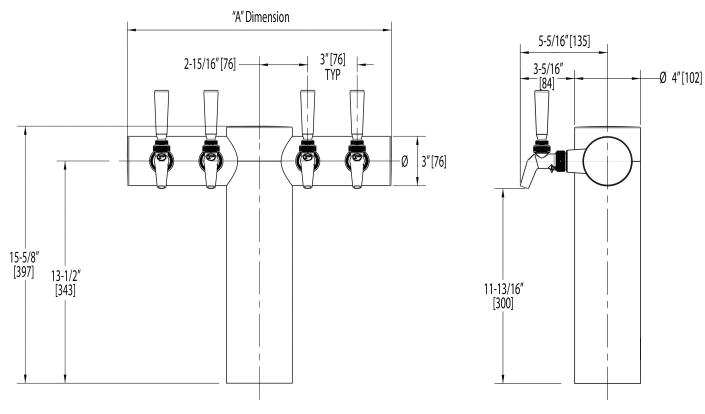

4073-4QC-PO-SS

Form No. Z2715 Rev. 02.28.23