## UNDERBAR BLENDER STATION With Sink Bowl



JOB	
AREA	
ITEM NO.	
MODEL NO.	

**TS Series** 

TS12BLW

**MODELS** 

**TSD Series** 

TSD12BLW







## **KEY PRODUCT FEATURES AND BENEFITS**


- All stainless construction for durability
- Great for applications where blended drinks are in high demand
- Designed to fit next to equipment with a single speed rail applied
- Convenient front mounted heavy duty shelf with access hole for electrical cord supports most modern commercial blenders
- Stainless steel legs install without tools and have rust free thermoplastic adjustable feet

## **Quick Features:**

- · Heavy duty deep drawn stainless sink bowl for long life of the equipment
- Various NSF listed faucet options available to fit your needs
- · Sound deadening materials are applied for quiet operation

## UNDERBAR BLENDER STATION With Sink Bowl

MODEL NOS.		TS(D)12BLW	TS(D)14BLW	TS(D)18BLW	
DIMENSIONS: EXTERIOR (mm)	Length	12" (305)	14" (356)	18" (457)	
	Width	24" on TS units 29" on TSD units			
	Height	36" on freestanding units 40 3/8" on modbar units			
	Weight (lbs)	45 lbs. (20 kg)	55 lbs. (25 kg)	60 lbs. (27 kg)	
PERLICK BAR EQUIPMENT	Top & Shelf	Stainless steel. Shelf includes access hole for plug-in cord.			
	Back & Bottom	Stainless steel			
	Backsplash	Stainless steel 6" high (4" high optional) with 1" return at top, mechanically fastened and sealed with steel support brackets. <b>TSD Series:</b> Stainless steel rear deck.			
	Legs	1-5/8" tubular, stainless steel with 1" adjustable thermoplastic foot.			
	Bowl	Stainless steel with sound deadening. All horizontal and vertical edges 1-3/4" radius with balled corners. Furnished with 1-1/2" stainless steel drain socket and duo-strainer. 10-5/8" x 9-5/8" x 6" deep.		Stainless steel with sound deadening. All horizontal and vertical edges 1-1/2" radius with balled corners. Furnished with 1-1/2" stainless steel drain socket and 8-1/2" stand pipe. 10" x 14" x 9-1/4" deep.	
	Water Faucet	Chrome plated, hot and cold, goose-neck faucet. Heavy-duty all brass construction.  Faucets must be ordered separately. Lead free faucet also available.			
PLUMBING	Drain Connection	1-1/2" NPS Male. Hot and cold water connection: <b>TS Series:</b> 3/8" O.D. copper supply tubes. <b>TSD Series:</b> 1/2" IPS shanks and nuts.			
ELECTRIC	Outlet	Duplex outlet included, but not installed.			

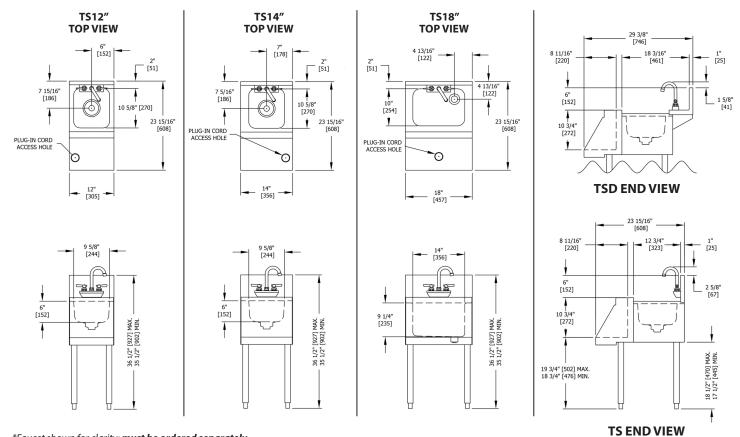

\*Faucet shown for clarity; must be ordered separately