

JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	
TS12SC	
TS18SC	
TS24SC	
TS30SC	
TS36SC	
TS42SC	
TS48SC	

KEY PRODUCT FEATURES AND BENEFITS

- All Perlick storage cabinets are NSF-certified, so you can feel confident knowing your equipment will meet health code standards.
- Drainboard tops and glass rack shelves are pitched to the drain, so water is evacuated quickly and effectively. With the matching insert, you still get a flat, level space to store your glassware.
- The default option of 'stadium' shaped perforated inserts enable great air flow for efficient glassware drying, maximize glass storage, and are designed to hold up to a busy bar environment abuse.
- Perlick's exclusive field reversible door allows you to change your mind on door swing without ordering any new parts. Option available on single door units.
- Our new, more robust Perlick Quick Clamp leg attachment still features easy tool-less installation.
- Shelving has 1/2" of adjustability from top to bottom, so you can dial in the perfect shelf height for your bar's glassware.

Additional Features:


- All storage cabinets have a bottom shelf, an adjustable intermediate shelf, and a perforated drainboard work surface.
- Swap out the perforated insert for a flat top insert when needs change and you want to use the storage cabinet as a workspace. Available on 12", 18", 24", 30".
- Optional chemical storage pan and optional doors allow you to easily use this unit next to a glasswasher to hold bottles and keep them out of sight. Available on single door units.
- Optional field reversible door available for 12", 16", 18", and 24" wide. All other models have optional two doors.
- Optional doors come standard with a lock set.
- A consistent front rail and backsplash height enhance the line-up appearance.
- Knockouts in the back and lower side of the equipment provide multiple plumbing options.

Form No. Z2873 Rev. 11.09.23



TOP SHELF STORAGE CABINETS With Drainboard Top

MODEL NOS.		TS12SC	TS18SC	TS24SC	TS30SC	TS36SC	TS42SC	TS48SC			
DIMENSIONS: Inches (mm)	Depth Ins. (mm)	18-9/16" (471.5)									
	Width Ins. (mm)	12" (305)	18" (457)	24″ (610)	30″ (762)	36" (914)	42" (1067)	48" (1219)			
	Weight (lbs)	30 (14)	40 (19)	65 (30)	80 (37)	100 (46)	115 (53)	120 (55)			
MATERIALS	General Parts	20 ga stainless steel									
	Perforated / flat insert	20 ga stainless steel									
	Backsplash	18 ga stainless steel									
	Optional door	18 ga stainless steel									
	Legs	16 ga stainless steel with 1" adjustable thermoplastic foot, 1-5/8" tubular									
	Shelf	20 ga, with 1/2" of adjustability									
MECHANICALS	Plumbing	Plumbing Drain connection: 1-1/2" NPS male									
CERTIFICATIONS	All models are NSF Certified										
ACCESSORIES	Top Options	Top Options Flat top insert, units come with a perforated insert									
	Other Options	 Doors: Ordered doors will come installed left hinged; doors are field reversible End splashes Leg relocation kit 									

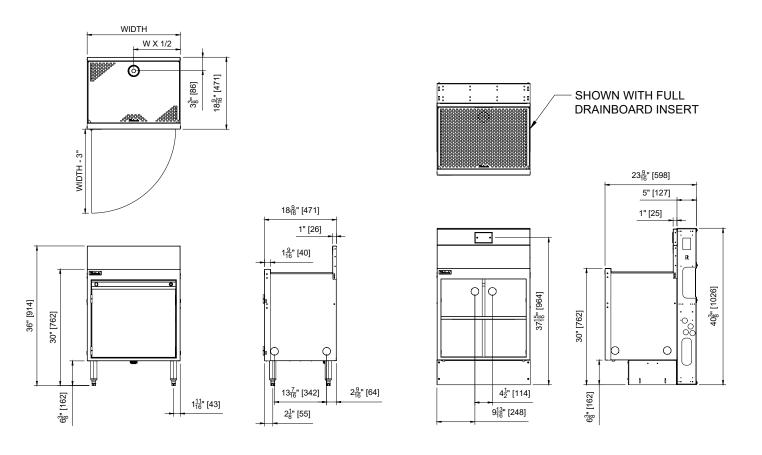

MODEL NUMBERS - TS12SC, TS18SC, TS24SC, TS30SC, TS36SC, TS42SC, TS48SC

Form No. Z2873 Rev. 11.09.23