



SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR
4-Door, Sliding



eco friendly
 R290 Hydrocarbon Refrigerant



SDPS60

JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	
SDPS60	4-Door Model

NSF/ANSI Standard 7 Listed for open food storage.

KEY PRODUCT FEATURES AND BENEFITS

- Easy access from both sides with self-closing sliding glass doors
- Sliding glass door can be propped open for easy stocking
- Stainless steel interior and top standard on all Perlick Back Bar refrigeration for long life durability and easy to clean hygienic storage
- 2" foamed-in-place eco-friendly insulation provides energy savings with zero ozone depletion
- NSF/ANSI Standard 7 Listed for open food, beverage, and garnish storage
- End wall compressor and evaporator design increases storage capacity by 14% compared to top mounted designs
- All sliding door models come with black framed glass doors
- Drawers not available on pass through models

Quick Features:

- Integrated door locks standard on all units
- Choose compressor mounted on left or right side of cabinet to match your space
- NSF Rated digital controller allows for easy and precise temperature changes
- Choose between three temperature ranges
 - Refrigerator (34°F-42°F) Factory set to 38°F
 - White Wine (40°F-65°F) Factory set to 45°F
 - Red Wine (40°F-65°F) Factory set to 60°F
- Choose between 6000K white LED lighting or cool blue display lighting
- Choose between flat shelving and wine racks for each compartment
- 1 Year Parts and Labor Warranty, 5 Year Compressor Warranty
- Made in USA




SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR
4-Door, Sliding

MODEL NUMBERS		SDPS60
NUMBER OF DOORS		4
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	60 (1524)
	Depth - in. (mm)	26 ¹ / ₁₆ (678)
	Height - in. (mm)	34 ³ / ₁₆ (878)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	44 (1118)
	Depth - in. (mm)	18 ³ / ₄ (476)
	Height - in. (mm)	28 ¹ / ₂ (724)
INTERNAL VOLUME Net. Cu. Ft. (Liters)		15.8 (447)
SHIPPING WEIGHT Lbs. (kg.)		380 (172)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph
	Running Load Amps	2.5
	Electrical Connection	Cord connected
	Cord Plug Type	NEMA 5-15
	Cord Length	6'5"
	Defrost Initiation	Automatic
	Defrost Type	Off cycle
	Thermostat	Digital control
REFRIGERATION SPECIFICATIONS	Lighting Type	LED
	Horsepower	1/5
	Refrigerant	R290
	Refrigerant Charge gm.	100
	Heat Rejection at 75F BTU/hr	1900
	Factory Temperature Setting-Refrigerator F (C)	38° (3.3°)
	Temperature Range-Refrigerator F (C)	33°-40° (0.5°-4.5°)
	Factory Temperature Setting-White Wine F (C)	50°-55° (10.0°-13.0°)
	Factory Temperature Setting-Red Wine F (C)	60°-65° (15.5°-18.0°)
	Temperature Range-Wine F (C)	50°-65° (10.0°-18.0°)
	Condensing Unit Location	Left
	Expansion Device	Capillary tube
	Pull Out Condensing Unit	Yes
Front Vented	Yes	
PLUMBING	Floor Drain Included	Yes
	Evaporator Condensate	Automatically

*Wine Temperature refrigerators do not carry NSF Rating for open food storage.
 Wine Temperature units are NSF certified for non-potentially hazardous bottled and canned beverage storage.*

Perlick SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR
4-Door, Sliding

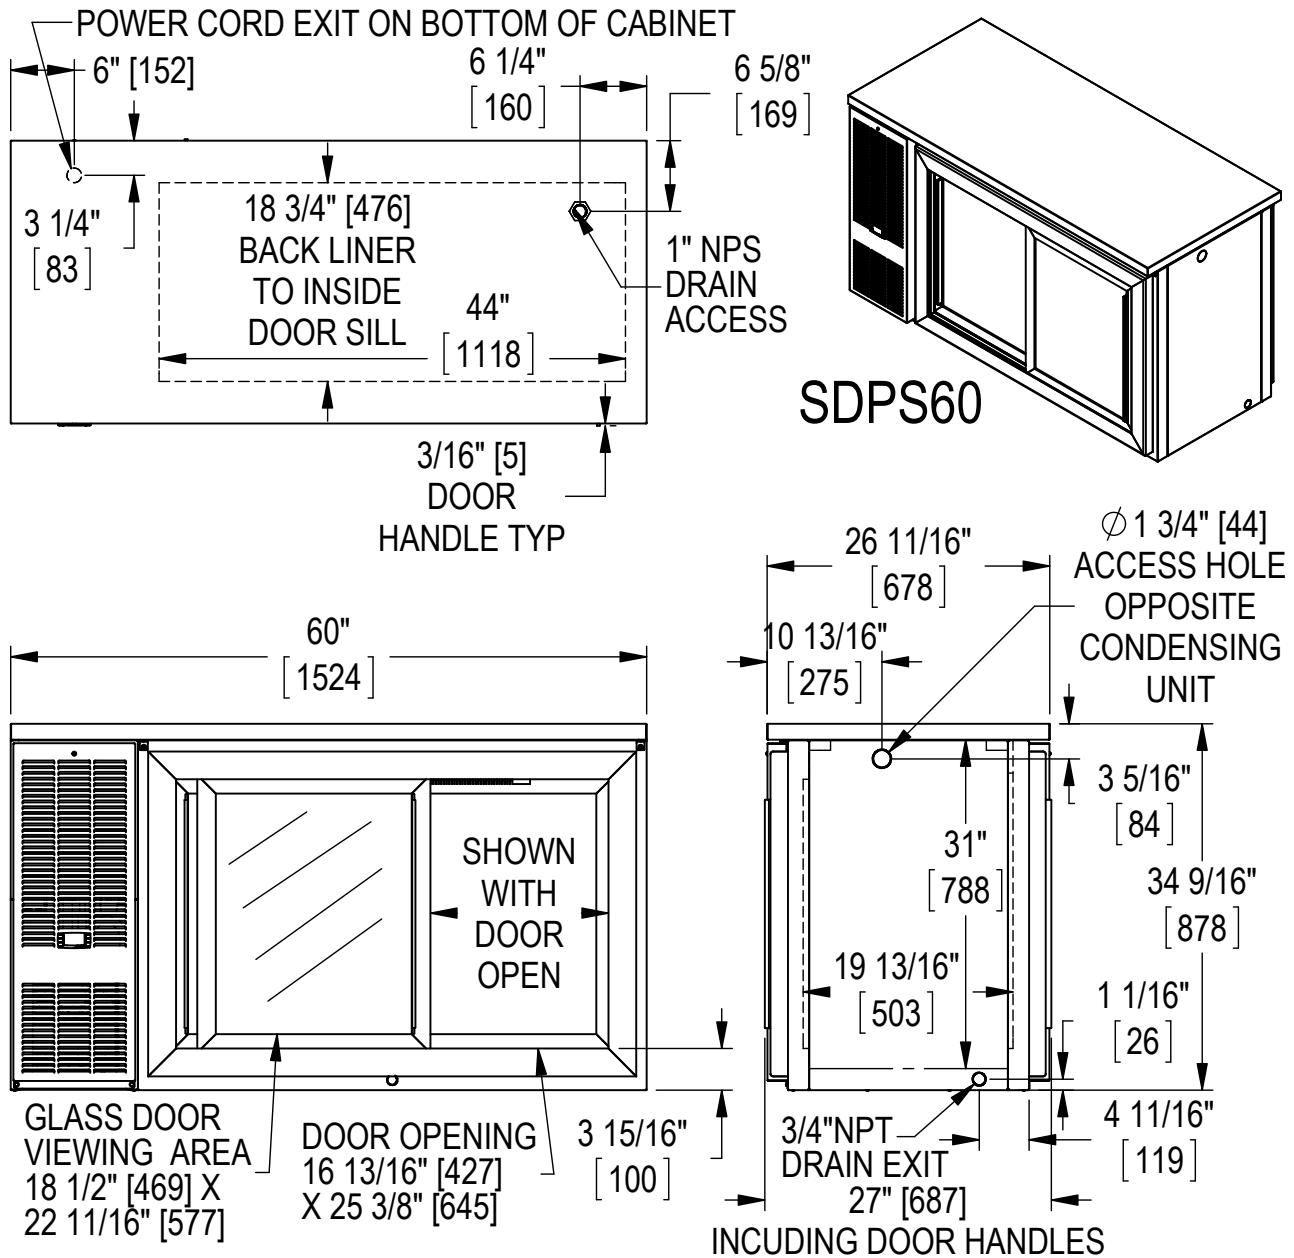

California Prop 65 Notice:

WARNING: The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Form No. Z2412
Rev. 06.16.2022